




Light horizontal multistage centrifugal pump

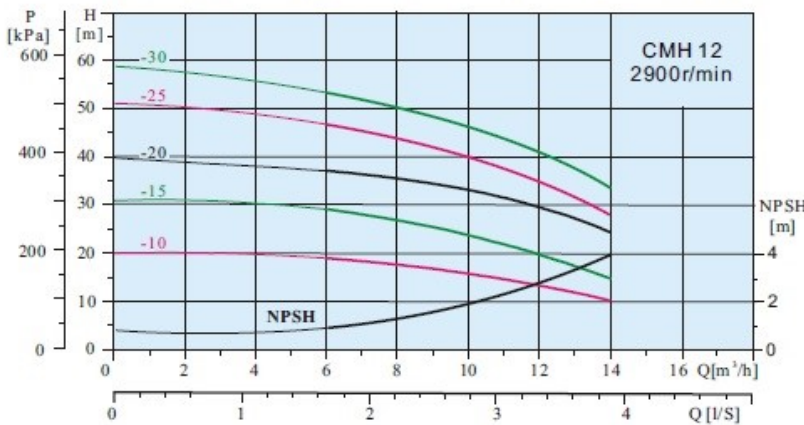

Performance curves

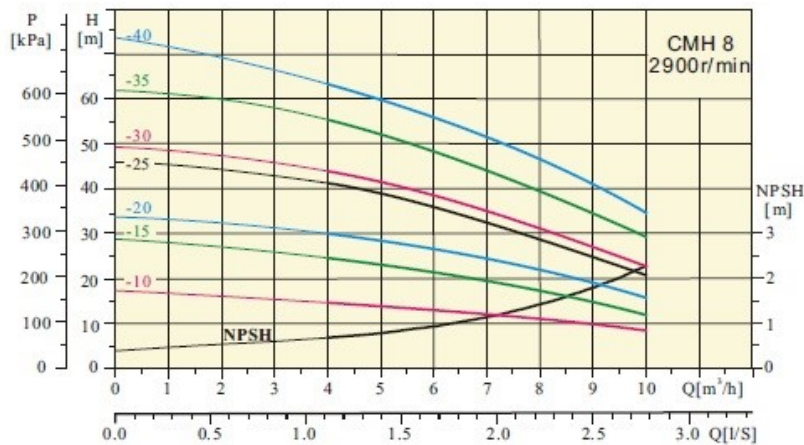

Installation Structure

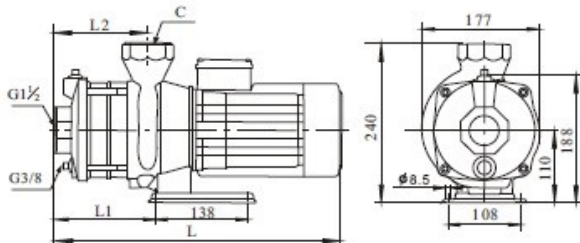

Motor

2-pole induction motor;
 three-phase: 380~415V/50Hz
 Single-phase: 220~240V/50Hz
 Single-phase with thermal protector
 Insulation class: B or F
 Protection: IPX5
 Continuous duty

Application:

CMH series are mini horizontal centrifugal pump, have a wide application in domestic water supply, industry and constructions. They are used for:

- Air-conditioning system
- Cooling system
- Fire fighting system
- Industrial cleaning, conveyance and circulation of liquid.
- Water treatment (Water purification)
- Domestic water supply, garden sprinkler
- Boosting, environment
- Many other special application.

Working conditions:

Thin, clean, non-flammable and non-explosive liquid containing no solid granules and fibers;
 Liquid temperature: Standard Model:
 -20°C~70°C, Hotwater less than 105°C;
 Max. environmental temperature: +50°C
 Max. operating pressure: 10 bar
 Max. suction pressure is limited by max. Operation pressure.